
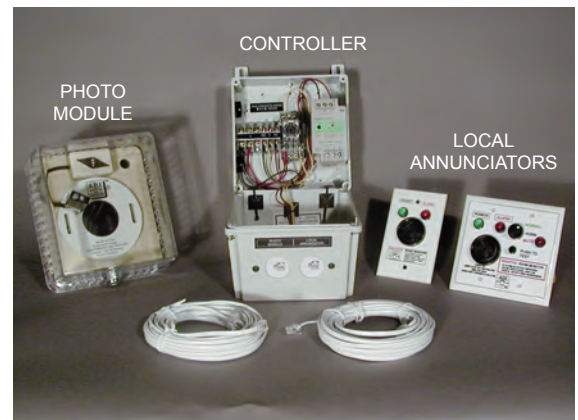


AIRFLOW DIRECTION INCORPORATED

Room Pressure / Airflow Direction *BALL-IN-THE-WALL** INDICATOR QUICK-REFERENCE SHEET

ADI® *BALL-IN-THE-WALL** Indicators are available in “Visual-Only” and “Visual-plus-Alarm” models.



Visual-Only

Simple, reliable, built-in failsafe feature and no electricity required!

Visual-plus-Alarm

Visual-Only *BALL-IN-THE-WALL** indicator *plus* Audio/Visual alarm & NO/NC Interface contacts.

MODEL NUMBER DESCRIPTIONS



Indicator Type: _____

V = Visual-Only

V+A = Visual-*plus*-Alarm

Room Type: _____

N = Negative Pressure Room (airflow into room)

P = Positive Pressure Room (airflow out of room)

N/P = *Manually* Switchable between Negative & Positive modes. Comes with one set of magnetic Negative & Positive Room Labels.

CURVE = For *Automated* Switchable Room. Comes with one Bi-Directional Label & one set of magnetic Negative & Positive Room Labels.

Security Options (V and V+A units):

Blank = No Security Option

INSEC = Inside Rm Security Plate

OUTSEC = Outside Rm Security Cage

Local Annunciator Options (V+A units only):

M&T = With Mute & Test Function

NOM&T = Without Mute & Test Function

NOLOCAL = Without local annunciator.

Construction Barrier Option (V and V+A units):

CONST = for Temporary Negative Construction Barriers/Walls

***** WHEN PLACING AN ORDER YOU MUST SPECIFY HERE** the Finished Outside Face-to-Face Wall Thickness (inches or mm). For multiple walls with different dimensions, use ADI'S "Room Schedule Sheet."



* USPTO Trademark Pending